

2021 ARGO XTV

*Conquest PRO*



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



## Built for Work

Through 50 plus years of innovation ARGO has built the most durable and versatile family of extreme terrain amphibious vehicles. With the 2021 Conquest Pro Series, ARGO also has the most capable and most dependable offering for work vehicle solutions.

Durability is at the heart of every Conquest Pro Series and the heart of every XTV is its engine. Available in either the 800 EFI (30HP) V-Twin Liquid Cooled and 950 EFI (40HP) V-Twin Fan Cooled engines these dependable powerplants are designed to operate in the harshest of conditions. Increased alternator output available on all Conquest Pro Series also provides an impressive 50-amps for powering accessories and implements without interruption.

Going hand-in-hand with power is capability and nothing is more capable than a vehicle known to Go-Anywhere and Do-Anything. The Conquest Pro Series are designed to get the job done and in doing so offers the largest footprint and greatest versatility. Built with reinforced steel beam exterior construction the Conquest Pro Series is capable of load capacities up to 1,210-pounds.

## Conquest Pro XT 8X8



The Conquest Pro XT 8x8 comes with a rear winch receiver kit and is available in Industrial Yellow or Green.

What's even more impressive is its 2,000-pound towing capacity.

The Conquest Pro Series CVT driven and invincible Admiral transmission, comes available from the factory in High Torque (HT) configuration. High Torque (HT) (19 mph • 30km/h) is a real workhorse and ideal when faced with the challenges of tackling extreme terrain. The selectable High / Low transmission allows the driver to choose between steering smoothly for fast moving ground travel or, when Low is selected, to benefit from zero-radius turning for navigating challenging terrain or when confined to tight work spaces.

When dollars are tied to down time, reliability becomes exceedingly crucial. The Conquest Pro Series auto chain lubrication system and oil-filled axles simplifies routine maintenance to ensure smooth, dependable operation regardless of the environment or the demands of the operator.

Legendary ARGO high ground clearance, incomparable amphibious capability and rugged exterior gives you the confidence knowing your work crew can trek further and

## Conquest Pro XT - L 8X8



The Conquest Pro XT-L 8x8 is equipped for emergency response with a ROPS protection cage with roof, and rear mesh. It's available in Industrial Yellow or Green.

come home safely. High-density polyethylene body, skid plates and heavy-duty welded steel brush-guards protect the Conquest Pro Series and its passengers from trail hazards and undercarriage damage. New 25-inch XT119 tires are mounted to ARGO's signature AirLock™ steel offset rims. The AirLock™ feature keeps the tire firmly fixed to the rim in rugged terrain while allowing operators to adjust tire pressure to the terrain and providing a 30% smoother ride.

Optional heavy-duty rubber tracks, which easily install around existing tires, provide optimum floatation over snow and swamp with minimal ground pressure. The lightweight design also provides exceptional traction and low-rolling resistance.

The Conquest Pro Series comes equipped with a 4500-lb Warn winch mounted to the heavy-duty commercial grade brushguard along with an extended range fuel tank with 9.5-gallon capacity.

Each model with the Conquest Pro Series line-up is designed with your needs in mind.

## Conquest Pro XT - X 8X8




The Conquest Pro XT-X 8x8 comes standard with a ROPS protection cage with roof, rear mesh and a power rear dump box. It's available in Industrial Yellow or Green.



## Admiral Transmission

Our multipurpose Admiral transmission provides the ideal combination of smoother steer and all-wheel constant traction

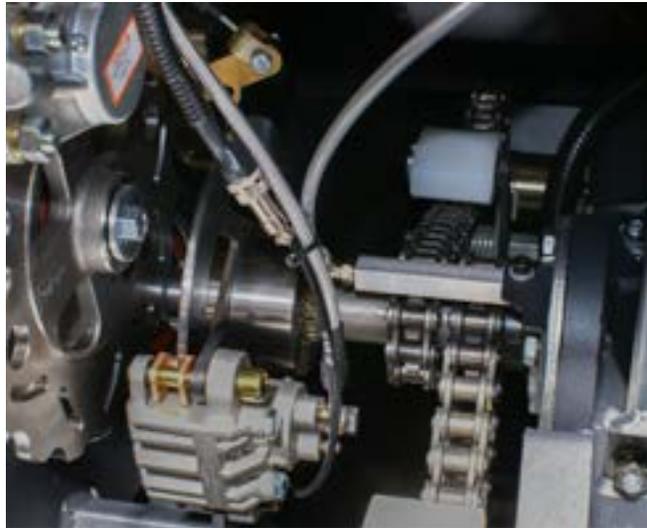

## Auto Chain Lubrication

Simplifies routine maintenance to ensure smooth, dependable operation for frequent users.



## 4500-Pound WARN Winch

Conquest come equipped with a mighty 4500-LB WARN Winch for the ultimate in utility, ease-of-use and durability. The winch is conveniently operated via an on-dash actuator.



## Alternator

Commercial grade alternator 60 amp standard on the 800 models and 50 amp on 950 models.



## Heavy Duty Axle

Heavy duty 1.5" forged axles in oil bathed reinforced housings.



## Power Dump Box

The XT-X solid steel Power Dump Box can move bulk loads up to 1,000 lbs (450 kg).

## 800 XT 8x8



### ENGINE

DISPLACEMENT	747 cc
CYLINDER	V-Twin
FUEL SYSTEM	EFI
COOLING	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	60 AMP
HP	30HP

### STEERING/WHEELS/TIRES

RIMS	Steel AirLock
TIRES	Argo XT 119 25x12-9
GROUND PRESSURE	
18" RUBBER TRACKS	1.06 psi (7.3 kPa)
GROUND CLEARANCE - TIRES	9.0 in (229 mm)
GROUND CLEARANCE - TRACKS	10.0 in (254 mm)

### POWERTRAIN

TRANSMISSION	Admiral
TRANSMISSION OPTION	ST
HD DRIVE BELT	Standard
SERVICE BRAKES	Hydraulic
STEERING BRAKES	Hydraulic
AUTO CHAIN LUBRICATION	Standard

### DIMENSIONS/WEIGHT/CAPACITY

LENGTH	125 in (3,175 mm)
WIDTH	65 in (1,651 mm)
HEIGHT	49 in (1,245 mm)
LOAD CAPACITY - LAND	1,203 lb. (546 kg)
LOAD CAPACITY WATER	503 lb. (228 kg)
TOWING CAPACITY	2,000 lb. (907 kg)
WEIGHT	1,883 lb. (854 kg)
FUEL CAPACITY	9.5 US gallons (36 litres)
SEAT CAPACITY	2 Land / 2 Water
FRONT RACK	Accessory
SPEED ON LAND	17 mph (27 km/h)
SPEED ON WATER	3 mph (5 km/h)

### FEATURES

BRUSHGUARD	Standard
WINCH - FRONT	4,500 lb WARN Winch
WINCH - REAR RECEIVER KIT	Accessory
SKID PLATE	Standard
BILGE PUMP	Standard
ENTRY STEP	Accessory
OPERATING CONDITIONS	All weather, all terrain, -40°F to +104°F (-40°C to +40°C)

ROLLOVER PROTECTION STRUCTURE	N/A
REAR MESH	N/A
ROOF	N/A
WINDSHIELD WITH WIPER	Accessory
POWER DUMP BOX	N/A
STRETCHER FRAME	N/A

### COLORS

AVAILABLE COLORS	Industrial Yellow/Green
------------------	-------------------------



## 950 XT 8x8



### ENGINE

DISPLACEMENT	993 cc
CYLINDER	V-Twin
FUEL SYSTEM	EFI
COOLING	Fan Cooled
ALTERNATOR OUTPUT (MAX)	50 AMP
HP	40HP

### STEERING/WHEELS/TIRES

RIMS	Steel AirLock
TIRES	Argo XT 119 25x12-9
GROUND PRESSURE	
18" RUBBER TRACKS	1.06 psi (7.3 kPa)
GROUND CLEARANCE - TIRES	9.0 in (229 mm)
GROUND CLEARANCE - TRACKS	10.0 in (254 mm)

### POWERTRAIN

TRANSMISSION	Admiral
TRANSMISSION OPTION	ST
HD DRIVE BELT	Standard
SERVICE BRAKES	Hydraulic
STEERING BRAKES	Hydraulic
AUTO CHAIN LUBRICATION	Standard

### DIMENSIONS/WEIGHT/CAPACITY

LENGTH	125 in (3,175 mm)
WIDTH	65 in (1,651 mm)
HEIGHT	49 in (1,245 mm)
LOAD CAPACITY - LAND	1,210 lb. (549 kg)
LOAD CAPACITY WATER	510 lb. (231 kg)
TOWING CAPACITY	2,000 lb. (907 kg)
WEIGHT	1,890 lb. (857 kg)
FUEL CAPACITY	9.5 US gallons (36 litres)
SEAT CAPACITY	2 Land / 2 Water
FRONT RACK	Accessory
SPEED ON LAND	17 mph (27 km/h)
SPEED ON WATER	3 mph (5 km/h)

### FEATURES

BRUSHGUARD	Standard
WINCH - FRONT	4,500 lb WARN Winch
WINCH - REAR RECEIVER KIT	Accessory
SKID PLATE	Standard
BILGE PUMP	Standard
ENTRY STEP	Accessory
OPERATING CONDITIONS	All weather, all terrain, -40°F to +104°F (-40°C to +40°C)
ROLLOVER PROTECTION STRUCTURE	N/A
REAR MESH	N/A
ROOF	N/A
WINDSHIELD WITH WIPER	Accessory
POWER DUMP BOX	N/A
STRETCHER FRAME	N/A

### COLORS

AVAILABLE COLORS	Industrial Yellow/Green
------------------	-------------------------



## 800 XT-L 8x8



### ENGINE

DISPLACEMENT	747 cc
CYLINDER	V-Twin
FUEL SYSTEM	EFI
COOLING	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	60 AMP
HP	30HP

### STEERING/WHEELS/TIRES

RIMS	Steel AirLock
TIRES	Argo XT 119 25x12-9
GROUND PRESSURE	
18" RUBBER TRACKS	1.06 psi (7.3 kPa)
GROUND CLEARANCE - TIRES	9.0 in (229 mm)
GROUND CLEARANCE - TRACKS	10.0 in (254 mm)

### POWERTRAIN

TRANSMISSION	Admiral
TRANSMISSION OPTION	ST
HD DRIVE BELT	Standard
SERVICE BRAKES	Hydraulic
STEERING BRAKES	Hydraulic
AUTO CHAIN LUBRICATION	Standard

### DIMENSIONS/WEIGHT/CAPACITY

LENGTH	125 in (3,175 mm)
WIDTH	65 in (1,651 mm)
HEIGHT	80.5 in (2,045 mm)
LOAD CAPACITY - LAND	1,041 lb. (472 kg)
LOAD CAPACITY WATER	Not Amphibious
TOWING CAPACITY	2,000 lb. (907 kg)
WEIGHT	2,045 lb. (928 kg)
FUEL CAPACITY	9.5 US gallons (36 litres)
SEAT CAPACITY	2 Land
FRONT RACK	Accessory
SPEED ON LAND	17 mph (27 km/h)
SPEED ON WATER	N/A

### FEATURES

BRUSHGUARD	Standard
WINCH - FRONT	4,500 lb. WARN Winch
WINCH - REAR RECEIVER KIT	Standard
SKID PLATE	Standard
BILGE PUMP	Standard
ENTRY STEP	Accessory
OPERATING CONDITIONS	All weather, all terrain, -40°F to +104°F (-40°C to +40°C)
ROLLOVER PROTECTION STRUCTURE	Standard
REAR MESH	Standard
ROOF	Standard
WINDSHIELD WITH WIPER	Accessory
POWER DUMP BOX	N/A
STRETCHER FRAME	N/A

### COLORS

AVAILABLE COLORS	Industrial Yellow/Green
------------------	-------------------------

## 950 XT-L 8x8



### ENGINE

DISPLACEMENT	993 cc
CYLINDER	V-Twin
FUEL SYSTEM	EFI
COOLING	Fan Cooled
ALTERNATOR OUTPUT (MAX)	50 AMP
HP	40HP

### STEERING/WHEELS/TIRES

RIMS	Steel AirLock
TIRES	Argo XT 119 25x12-9
GROUND PRESSURE	
18" RUBBER TRACKS	1.06 psi (7.3 kPa)
GROUND CLEARANCE - TIRES	9.0 in (229 mm)
GROUND CLEARANCE - TRACKS	10.0 in (254 mm)

### POWERTRAIN

TRANSMISSION	Admiral
TRANSMISSION OPTION	ST
HD DRIVE BELT	Standard
SERVICE BRAKES	Hydraulic
STEERING BRAKES	Hydraulic
AUTO CHAIN LUBRICATION	Standard

### DIMENSIONS/WEIGHT/CAPACITY

LENGTH	125 in (3,175 mm)
WIDTH	65 in (1,651 mm)
HEIGHT	80.5 in (2,045 mm)
LOAD CAPACITY - LAND	1,048 lb. (475 kg)
LOAD CAPACITY WATER	Not Amphibious
TOWING CAPACITY	2,000 lb. (907 kg)
WEIGHT	2,052 lb. (931 kg)
FUEL CAPACITY	9.5 US gallons (36 litres)
SEAT CAPACITY	2 Land
FRONT RACK	Accessory
SPEED ON LAND	17 mph (27 km/h)
SPEED ON WATER	N/A

### FEATURES

BRUSHGUARD	Standard
WINCH - FRONT	4,500 lb. WARN Winch
WINCH - REAR RECEIVER KIT	Standard
SKID PLATE	Standard
BILGE PUMP	Standard
ENTRY STEP	Accessory
OPERATING CONDITIONS	All weather, all terrain, -40°F to +104°F (-40°C to +40°C)
ROLLOVER PROTECTION STRUCTURE	Standard
REAR MESH	Standard
ROOF	Standard
WINDSHIELD WITH WIPER	Accessory
POWER DUMP BOX	N/A
STRETCHER FRAME	N/A

### COLORS

AVAILABLE COLORS	Industrial Yellow/Green
------------------	-------------------------



## 800 XT-X 8x8



### ENGINE

DISPLACEMENT	747 cc
CYLINDER	V-Twin
FUEL SYSTEM	EFI
COOLING	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	60 AMP
HP	30HP

### STEERING/WHEELS/TIRES

RIMS	Steel AirLock
TIRES	Argo XT 119 25x12-9
GROUND PRESSURE	
18" RUBBER TRACKS	1.06 psi (7.3 kPa)
GROUND CLEARANCE - TIRES	9.0 in (229 mm)
GROUND CLEARANCE - TRACKS	10.0 in (254 mm)

### POWERTRAIN

TRANSMISSION	Admiral
TRANSMISSION OPTION	ST
HD DRIVE BELT	Standard
SERVICE BRAKES	Hydraulic
STEERING BRAKES	Hydraulic
AUTO CHAIN LUBRICATION	Standard

### DIMENSIONS/WEIGHT/CAPACITY

LENGTH	125 in (3,175 mm)
WIDTH	65 in (1,651 mm)
HEIGHT	80.5 in (2,045 mm)
LOAD CAPACITY - LAND	841 lb. (381 kg)
LOAD CAPACITY WATER	Not Amphibious
TOWING CAPACITY	2,000 lb. (907 kg)
WEIGHT	2,245 lb. (1,018 kg)
FUEL CAPACITY	9.5 US gallons (36 litres)
SEAT CAPACITY	2 Land
FRONT RACK	Accessory
SPEED ON LAND	17 mph (27 km/h)
SPEED ON WATER	N/A

### FEATURES

BRUSHGUARD	Standard
WINCH - FRONT	4,500 lb. WARN Winch
WINCH - REAR RECEIVER KIT	Standard
SKID PLATE	Standard
BILGE PUMP	Standard
ENTRY STEP	Accessory
OPERATING CONDITIONS	All weather, all terrain, -40°F to +104°F [-40°C to +40°C]
ROLLOVER PROTECTION STRUCTURE	Standard
REAR MESH	Standard
ROOF	Standard
WINDSHIELD WITH WIPER	Accessory
POWER DUMP BOX	Standard
STRETCHER FRAME	N/A

### COLORS

AVAILABLE COLORS	Industrial Yellow/Green
------------------	-------------------------

